Hay & Forage

DM5050 Disc Mower

Equipment for Base Machine

Hitch Type: 3-Point
Hitch Category: Category I or II (iMatch and
Quick-Coupler Compatible)
Cutting Width: 6 Ft. 6 In.
Operating Weight: 874 Lbs.
Operation Cutting Angle:
+/- 25 Degrees
Number of Cutting Discs: 5
Number of Knives: 10
PTO Drive: 540 RPM
PTO HP Requirement: 40 HP Minimum
Belt Drive: 4 V-Belts with Tensioner
Average Swath Width: 4 Ft. 6 In.

Cutterbar Lift Mechanism: Hydraulic Outer Swath Wheel: Optional Safety Breakaway: Yes Required Hydraulic Outlets: 1 Single Acting Valve Set-Up Time: 1.5 Hour Warranty: 1 Year

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category | |
| 0561XF | | BASE MACHINE DM5050 Disc Mower | 11,935.00 |
| 9070 | | SWATH WHEEL Swoth Wheel Attachment (DME) Series) | 172.00 |
| 9070 | | Swath Wheel Attachment (DM50 Series) ATTACHMENTS FOR FIELD CONVERSION | 172.00 |
| | 5TIDM411274 | Miscellaneous Swath Wheel Attachment (DM50 Series) | 178.20 |

Hay & Forage

DM5050 Disc Mower Continued

Hay & Forage

DM5060 Disc Mower

Equipment for Base Machine

Hitch Type: 3-Point
Hitch Category: Category I or II (iMatch and
Quick-Coupler Compatible)
Cutting Width: 7 Ft. 9 In.
Operating Weight: 975 Lbs.
Operation Cutting Angle:
+/- 25 Degrees
Number of Cutting Discs: 6
Number of Knives: 12
PTO Drive: 540 RPM
PTO HP Requirement: 45 HP Minimum
Belt Drive: 4 V-Belts with Tensioner
Average Swath Width: 5 Ft. 9 In.

5TIDM411274


Cutterbar Lift Mechanism: Hydraulic Outer Swath Wheel: Optional Safety Breakaway: Yes Required Hydraulic Outlets: 1 Single Acting Valve Set-Up Time: 1.5 Hour Warranty: 1 Year

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| 0571XF | | BASE MACHINE DM5060 Disc Mower | 12,784.00 |
| 997.77 | | SWATH WHEEL | 12,10110 |
| 9070 | | Swath Wheel Attachment (DM50 Series) | 172.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | | Miscellaneous | |

Swath Wheel Attachment (DM50 Series)

178.20

Hay & Forage

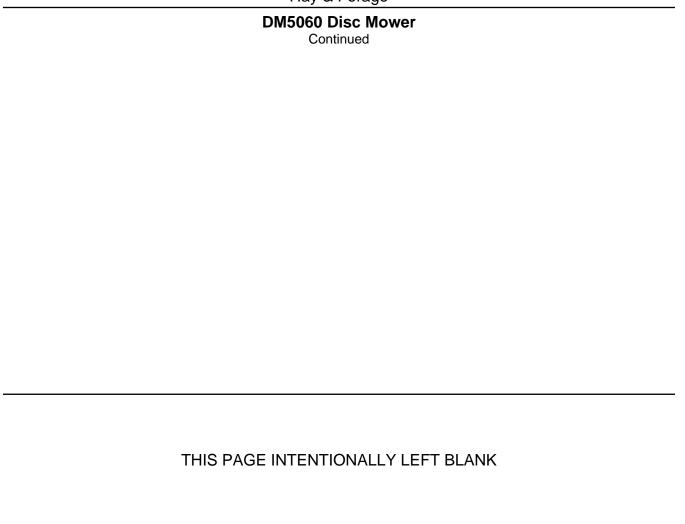

Hay & Forage

DM5070 Disc Mower

Equipment for Base Machine

Hitch Type: 3-Point
Hitch Category: Category I or II (iMatch and
Quick-Coupler Compatible)
Cutting Width: 9 Ft.
Operating Weight: 1143 Lbs.
Operation Cutting Angle:
+/- 25 Degrees
Number of Cutting Discs: 7
Number of Knives: 14
PTO Drive: 540 RPM
PTO HP Requirement: 55 HP Minimum
Belt Drive: 4 V-Belts with Tensioner
Average Swath Width: 7 Ft.

5TIDM411274


Cutterbar Lift Mechanism: Hydraulic Outer Swath Wheel: Optional Safety Breakaway: Yes Required Hydraulic Outlets: 1 Single Acting Valve Set-Up Time: 1.5 Hour Warranty: 1 Year

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|---------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| 0581XF | | BASE MACHINE DM5070 Disc Mower | 13,505.00 |
| 0001741 | | | 10,000.00 |
| | | SWATH WHEEL | |
| 9070 | | Swath Wheel Attachment (DM50 Series) | 172.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | | Miscellaneous | |

Swath Wheel Attachment (DM50 Series)

178.20

Hay & Forage

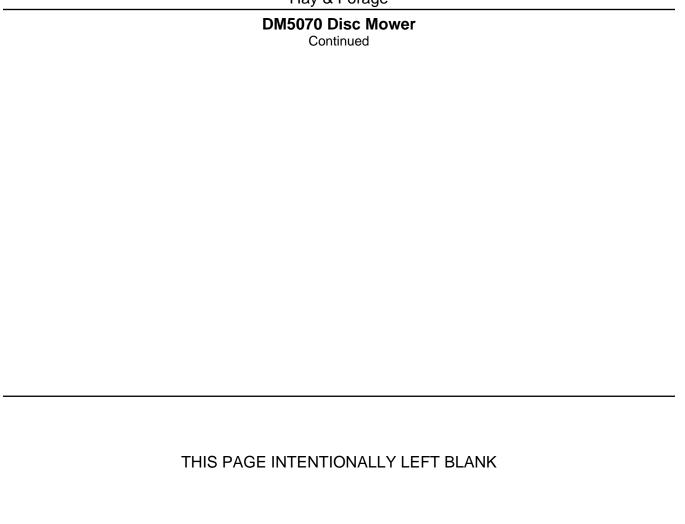

Hay & Forage

DC1000 Disc Mower Caddy

Equipment for Base Machine


Variable Integrated Ballasting System
Utilizes Standard John Deere Weights
and Internal Ballast
Hydraulic Lift 3-Point Hitch
Includes Cylinders, Hoses, and Tips
Adjustable Clevis Tongue
Equal Angle Category IV 540 PTO Included

11L x 15SL Ribbed Implement Tires

| Code | Attachment Identifier | | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| 0541XF | | BASE MACHINE DC1000 Disc Mower Caddy Assembly Required: 3 hours | 6,336.00 |

Attachment Information is not available in MOCI for the base code 0541XF

Hay & Forage

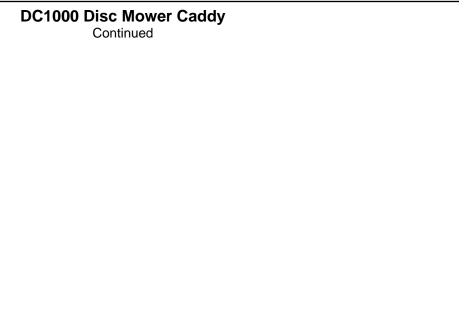

THIS PAGE INTENTIONALLY LEFT BLANK

Hay & Forage

TD1316 Heavy Duty 4 Basket Hay Tedder

Equipment for Base Machine

Hitch Type: Drawbar
Number of Rotors: 4
Number of Baskets: 4
Number of Tine Arms per Rotor: 6
Width in Working Position: 17 Ft. 8 In.
Tedding Width: 16 Ft. 5 In.
Tires: 15 x 6.00-6
Transport Width: 9 Ft. 2 In.
PTO with Torque Limiter: Standard
PTO HP Requirement: 20 HP
Required Hydraulic Outlets:
1 Double Acting Valve

Reduction Gearbox for Night Windrows: Optional Anti-Wrap Deflectors: Optional Shipping Weight: 1005 lbs. Set-Up Time: 6 Man Hours/Unit Warranty: 1 Year

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category | |
| 007475 | | BASE MACHINE TD4246 Usery Pitty 4 Peoplet Usy Todder | 40 505 00 |
| 0071XF | | TD1316 Heavy Duty 4 Basket Hay Tedder | 10,585.00 |
| 904O | | OPERATOR'S MANUAL AND DECALS | 57.00 |
| 9040 | | French OM & Decal Kit (TD1316) | 57.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5KNK8806521 | Miscellaneous French Operators Manual and Frontier Decals (TD1316) | 59.40 |

Hay & Forage

TD1316 Heavy Duty 4 Basket Hay Tedder Continued

THIS PAGE INTENTIONALLY LEFT BLANK

Hay & Forage

TD3418 Four Rotor 18 Ft. 2 In. Working Width Tedder

Equipment for Base Machine

10/2 Turbo Tines are Designed for Clean and Efficient Tedding Radial Pin Clutch 540 RPM PTO Shaft Fully Enclosed Oil Bath Gearboxes Finger Joints at Wing Pivot Points Standard Hydraulic Lift and Tilt SMV, and Safety Tow Chain are Standard Equipment

1 Year Parts and Labor Warranty

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category | |
| 0331XF | | BASE MACHINE TD3418 Four Rotor 18 Ft. 2 In. Working Width Tedder | 13,552.00 |
| 9200 | | OPERATOR'S MANUAL French Operators Manual | No Added Cost |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5PQ903198 | Miscellaneous French Operators Manual (TD3418) | 116.60 |

Hay & Forage

TD3418 Four Rotor 18 Ft. 2 In. Working Width Tedder Continued

THIS PAGE INTENTIONALLY LEFT BLANK

Hay & Forage

TD3427 Six Rotor 26 Ft. 4 In. Working Width Tedder

Equipment for Base Machine

10/2 Turbo Tines are Designed for Clean and Efficient Tedding Radial Pin Clutch 540 RPM PTO Shaft Fully Enclosed Oil Bath Gearboxes Finger Joints at Wing Pivot Points Standard Hydraulic Lift and Tilt Transport Lights, SMV, and Safety Tow Chain are Standard Equipment

1 Year Parts and Labor Warranty

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category |] |
| 0341XF | | BASE MACHINE TD3427 Six Rotor 26 Ft. 4 In. Working Width Tedder | 27,634.00 |
| 034171 | | 1D3421 3ix Notol 20 Ft. 4 III. Working Width Teddel | 21,034.00 |
| | | OPERATOR'S MANUAL | |
| 9200 | | French Operators Manual | No Added Cost |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5PQ903199 | Miscellaneous French Operators Manual (TD3427) | 132.00 |

Hay & Forage

TD3427 Six Rotor 26 Ft. 4 In. Working Width Tedder Continued

THIS PAGE INTENTIONALLY LEFT BLANK

Hay & Forage

WR1212 High Capacity Wheel Rake

Equipment for Base Machine

Number of Wheels: 12
Teeth per Wheel: 40
Tooth Diameter: 7 mm
Wheel Diameter: 55 In.
Transport Width: 8 Ft. 1 In.
Transport Length: 24 Ft. 6 In.
Raking Width:
Up to 24 Ft. Hydraulic Settings
Windrow Width Adjustment:
38 In. to 58 In.
Raking Wheel Hubs: Tapered Bearings
Wing Flex: 3 Ft. Up or Down
Number of Transport Wheels: 4

Hitch Jack: Standard Center Kicker Wheels: Optional Tandem Rear Wheels: Optional Transport Wheels: 6.70 x 15 In. Gauge Wheels: 15 In. Assembly/Set-Up Time: 7 Man Hours Weight: 3500 lbs.

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category |] |
| | | BASE MACHINE | |
| 0101XF | | WR1212 High Capacity Wheel Rake Raking widths up to 24 Ft. Order hydraulic couplers as attachments. | 20,800.00 |
| | | CENTER KICKER WHEEL OPTION | |
| 3100 | | Center Kicker Wheel Two center kicker wheels with hydraulic lift for WR12 Series. | 2,224.00 |
| 3110 | | No Center Kicker Wheel WR12 Series Wheel Rake. | In Base Price |
| | | TANDEM WHEELS | |
| 4400 | | WR12 Series Rear Tandem Wheels | 1,466.00 |
| 4410 | | WR12 Series No Rear Tandem Wheels | In Base Price |
| | | WIND PANEL OPTION | |
| 9100 | | WR12 Series Wind Panels with Hardware <i>Quantity of 12.</i> | 366.00 |
| | | CENTER KICKER WHEEL OPTION | |
| 9310 | | WR12 Series Center Kicker Wheels (3) Three center kicker wheels with hydraulic lift. | 3,845.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5HPBFO212HC | Miscellaneous Center Kicker Wheels (2) | 2,422.20 |

Hay & Forage

WR1212 High Capacity Wheel Rake

Continued

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|------|--------------------------|--|-------------------------------------|
| | 5HPBFO23W12 | ATTACHMENTS FOR FIELD CONVERSIONContinued Center Kicker Wheels (3) | 3,989.71 |
| | 5HPBFOWP55 | One Wind Panel with Hardware | 44.78 |
| | 5HPBFO6 | Rear Tandem Wheels | 1,738.94 |
| | 5HPBFO13 | Set of Hydraulic Couplers | 41.80 |

List Price

FRONTIER PRODUC

Hay & Forage

WR1214 High Capacity Wheel Rake with Rear Tandem Wheels

Equipment for Base Machine

Number of Wheels: 14
Teeth per Wheel: 40
Tooth Diameter: 7 mm
Wheel Diameter: 55 In.
Transport Width: 8 Ft. 1 In.
Transport Length: 27 Ft. 3 In.
Raking Width:
Up to 28 Ft. Hydraulic Settings
Windrow Width Adjustment:
38 In. to 58 In.
Raking Wheel Hubs: Roller Bearings
Wing Flex: 3 Ft. Up or Down
Number of Transport Wheels: 6
Hitch Jack: Standard

Center Kicker Wheels: Optional Tandem Rear Wheels: Standard Wheel Expansion: Optional Transport Wheels: 6.70 x 15 In. Gauge Wheels: 15 In. Assembly/Set-Up Time: 8 Man Hours Weight: 3800 lbs.

| Code | Attachment Identifier | Description | Suggested USD (\$) |
|--------|--------------------------|---|-----------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0102XF | | WR1214 High Capacity Wheel Rake with Rear Tandem Wheels Raking widths up to 28 Ft. Order hydraulic couplers as attachments. | 26,988.00 |
| | | CENTER KICKER WHEEL OPTION | |
| 3100 | | Center Kicker Wheel Two center kicker wheels with hydraulic lift for WR12 Series. | 2,224.00 |
| 3110 | | No Center Kicker Wheel WR12 Series Wheel Rake. | In Base Price |
| | | RAKE BEAM SUPPORTS | |
| 6200 | | WR12 Series Rake Beam Support Wheels Includes 15 In. tires. | 1,772.00 |
| 6210 | | WR12 Series No Rake Beam Supports | In Base Price |
| | | WIND PANEL OPTION | |
| 9100 | | WR12 Series Wind Panels with Hardware Quantity of 14. | 428.00 |
| | | CENTER KICKER WHEEL OPTION | |
| 9310 | | WR12 Series Center Kicker Wheels (3) Three center kicker wheels with hydraulic lift. | 3,845.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5HPBFO214HC | Miscellaneous Center Kicker Wheels (2) | 2,422.20 |

Hay & Forage

WR1214 High Capacity Wheel Rake with Rear Tandem Wheels Continued

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|------|-----------------------|---|-------------------------------------|
| | 5HPBFO23W14 | ATTACHMENTS FOR FIELD CONVERSIONContinued Center Kicker Wheels (3) | 3,989.71 |
| | 5HPBFHC2 | Extension Kit - 2 Wheel Add On Ext Kit | 2,698.05 |
| | 5HPBFOWP55 | One Wind Panel with Hardware | 44.78 |
| | 5HPBFO415 | Rake Beam Support Wheels (WR1214 and WR1216) Includes 15 In. tires. | 1,910.71 |
| | 5HPBFO13 | Set of Hydraulic Couplers | 41.80 |

Hay & Forage

WR1216 High Capacity Wheel Rake with Rear Tandem Wheels

Equipment for Base Machine

Number of Wheels: 16
Teeth per Wheel: 40
Tooth Diameter: 7 mm
Wheel Diameter: 55 In.
Transport Width: 8 Ft. 1 In.
Transport Length: 30 Ft. 3 In.
Raking Width:
Up to 32 Ft. Hydraulic Settings
Windrow Width Adjustment:
38 In. to 58 In.
Raking Wheel Hubs: Roller Bearings
Wing Flex: 3 Ft. Up or Down
Number of Transport Wheels: 6

Hitch Jack: Standard Center Kicker Wheels: Optional Tandem Rear Wheels: 5tandard Transport Wheels: 6.70 x 15 In. Gauge Wheels: 15 In. Assembly/Set-Up Time: 9 Man Hours Weight: 4200 lbs.

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0103XF | | WR1216 High Capacity Wheel Rake with Rear Tandem Wheels Raking widths up to 32 Ft. Order hydraulic couplers as attachments. | 28,392.00 |
| | | CENTER KICKER WHEEL OPTION | |
| 3100 | | Center Kicker Wheel Two center kicker wheels with hydraulic lift for WR12 Series. | 2,224.00 |
| 3110 | | No Center Kicker Wheel WR12 Series Wheel Rake. | In Base Price |
| | | RAKE BEAM SUPPORTS | |
| 6200 | | WR12 Series Rake Beam Support Wheels <i>Includes 15 In. tires.</i> | 1,772.00 |
| 6210 | | WR12 Series No Rake Beam Supports | In Base Price |
| 9100 | | WIND PANEL OPTION WR12 Series Wind Panels with Hardware Quantity of 16. | 488.00 |
| 9310 | | CENTER KICKER WHEEL OPTION WR12 Series Center Kicker Wheels (3) Three center kicker wheels with hydraulic lift. | 3,845.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | | | |

Miscellaneous
5HPBFO214HC Center Kicker Wheels (2)

2,422.20

Hay & Forage

WR1216 High Capacity Wheel Rake with Rear Tandem Wheels Continued

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|------|-----------------------|---|-------------------------------------|
| | 5HPBFO23W14 | ATTACHMENTS FOR FIELD CONVERSIONContinued Center Kicker Wheels (3) | 3,989.71 |
| | 5HPBFHC2 | Extension Kit - 2 Wheel Add On Ext Kit | 2,698.05 |
| | 5HPBFOWP55 | One Wind Panel with Hardware | 44.78 |
| | 5HPBFO415 | Rake Beam Support Wheels (WR1214 and WR1216) Includes 15 In. tires. | 1,910.71 |
| | 5HPBFO13 | Set of Hydraulic Couplers | 41.80 |

Hay & Forage

WR0008 Carted Finger Wheel Rake with 8 Wheels

Equipment for Base Machine

Rake Wheel Diameter:
55 In. (1397 mm)
Teeth Per Wheel: 40
Tooth Diameter:
7 mm (0.2756 In.)
Transport Width:
8 Ft. 2 In. (2.5 m)
Transport Length:
15 Ft. 6 In. (4.7 m)
Windrow Width Adjustment:
24 to 51 In. (610 to 1,295 mm) at 40 degree
working angle
Raking Width: 17 Ft. 8 In. Maximum (5.4 m) at 40
degree working angle

Raking Wheel Hubs: Tapered Bearings
Wing Flex: 3.9 in. (10 cm) Down; 19.7 in. (50 cm)
Up
Number of Transport Wheels: 2
Number of Raking Wheels: 8
Transport Wheels: 205/70-15
Hitch Jack: Standard
Center Kicker Wheel: Optional

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0350XF | | WR0008 Carted Finger Wheel Rake with 8 Wheels | 5,616.00 |
| | | CENTER KICKER WHEEL OPTION | |
| 3100 | | WR00 Series Center Kicker Wheel | 691.00 |
| 3110 | | WR00 Series No Center Kicker Wheel | In Base Price |
| | | WIND PANEL OPTION | |
| 9010 | | Wind Panels with Hardware Includes hardware and a quantity of 8 wind panels. | 352.00 |
| | | OPERATOR'S MANUAL AND DECAL KIT | |
| 9200 | | WR00 Series French Operators Manual and Decal Kit | 32.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5EPRRC001 | Miscellaneous Center Kicker Wheel (WR00 Series) | 717.20 |
| | 5EPWR00FRKIT | French Operators Manual and Decal Kit (WR00 Series) | 33.00 |
| | 5EP18032659 | Wind Panel with Hardware (WR00 Series) | 45.11 |

Hay & Forage

WR0008 Carted Finger Wheel Rake with 8 Wheels Continued

THIS PAGE INTENTIONALLY LEFT BLANK

List Price

FRONTIER PRODUCTS

Hay & Forage

WR0010 Carted Finger Wheel Rake with 10 Wheels

Equipment for Base Machine

Rake Wheel Diameter:
55 In. (1397 mm)
Teeth Per Wheel: 40
Tooth Diameter:
7 mm (0.2756 In.)
Transport Width:
8 Ft. 2 In. (2.5 m)
Transport Length:
17 Ft. 6 In. (5.3 m)
Windrow Width Adjustment:
24 to 51 In. (610 to 1,295 mm) at 40 degree
working angle
Raking Width: 21 Ft. Maximum (6.4 m) at 40 degree
working angle

Raking Wheel Hubs: Tapered Bearings
Wing Flex: 3.9 in. (10 cm) Down; 19.7 in. (50 cm)
Up
Number of Transport Wheels: 2
Number of Raking Wheels: 10
Transport Wheels: 205/70-15
Hitch Jack: Standard
Center Kicker Wheel: Optional

| Code | Attachment Identifier | Description | Suggested USD (\$) |
|--------|--------------------------|---|-----------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0351XF | | WR0010 Carted Finger Wheel Rake with 10 Wheels | 6,331.00 |
| | | CENTER KICKER WHEEL OPTION | |
| 3100 | | WR00 Series Center Kicker Wheel | 691.00 |
| 3110 | | WR00 Series No Center Kicker Wheel | In Base Price |
| | | WIND PANEL OPTION | |
| 9010 | | Wind Panels with Hardware Includes hardware and a quantity of 10 wind panels. | 439.00 |
| | | OPERATOR'S MANUAL AND DECAL KIT | |
| 9200 | | WR00 Series French Operators Manual and Decal Kit | 32.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5EPRRC001 | Miscellaneous Center Kicker Wheel (WR00 Series) | 717.20 |
| | 5EPWR00FRKIT | French Operators Manual and Decal Kit (WR00 Series) | 33.00 |
| | 5EP18032659 | Wind Panel with Hardware (WR00 Series) | 45.11 |

Grounds Equipment - Bid #ESCNJ 18/19-25

Hay & Forage

WR0010 Carted Finger Wheel Rake with 10 Wheels Continued

| THIS PAGE INTENTIONALLY LEFT BLANI | TΗ | IS | PAGE | INTE | NTION | IALLY | LEFT | BLAN | K |
|------------------------------------|----|----|------|------|-------|-------|------|------|---|
|------------------------------------|----|----|------|------|-------|-------|------|------|---|

Hay & Forage

WR0012 Carted Finger Wheel Rake with 12 Wheels

Equipment for Base Machine

Rake Wheel Diameter:
55 In. (1397 mm)
Teeth Per Wheel: 40
Tooth Diameter:
7 mm (0.2756 In.)
Transport Width:
8 Ft. 2 In. (2.5 m)
Transport Length:
18 Ft. 9 In. (5.7 m)
Windrow Width Adjustment:
24 to 51 In. (610 to 1,295 mm) at 40 degree
working angle
Raking Width: 24 Ft. 4 In. Maximum (7.4 m) at 40
degree working angle

Raking Wheel Hubs: Tapered Bearings
Wing Flex: 3.9 in. (10 cm) Down; 19.7 in. (50 cm)
Up
Number of Transport Wheels: 2
Number of Raking Wheels: 12
Transport Wheels: 205/70-15
Hitch Jack: Standard
Center Kicker Wheel: Optional

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0352XF | | WR0012 Carted Finger Wheel Rake with 12 Wheels | 7,110.00 |
| | | CENTER KICKER WHEEL OPTION | |
| 3100 | | WR00 Series Center Kicker Wheel | 691.00 |
| 3110 | | WR00 Series No Center Kicker Wheel | In Base Price |
| 9010 | | WIND PANEL OPTION Wind Panels with Hardware Includes hardware and a quantity of 12 wind panels. | 526.00 |
| 9200 | | OPERATOR'S MANUAL AND DECAL KIT WR00 Series French Operators Manual and Decal Kit ATTACHMENTS FOR FIELD CONVERSION | 32.00 |
| | 5EPRRC001 | Miscellaneous Center Kicker Wheel (WR00 Series) | 717.20 |
| | 5EPWR00FRKIT | French Operators Manual and Decal Kit (WR00 Series) | 33.00 |
| | 5EP18032659 | Wind Panel with Hardware (WR00 Series) | 45.11 |

Hay & Forage

WR0012 Carted Finger Wheel Rake with 12 Wheels Continued

THIS PAGE INTENTIONALLY LEFT BLANK

Hay & Forage

WR3108 High Capacity Carted Wheel Rake

Equipment for Base Machine

Rake Wheel Diameter: 60 In. (1524 mm)
Teeth Per Wheel: 40
Tooth Diameter: 0.28 In. (7 mm)
Transport Width: 9.83 Ft. (3 m)
Transport Length: 21.75 Ft. (6.6 m)
Windrow Width Adjustment: 16 to 90 In. (406 to 2286

Working Width: 16.75 Ft. (5.1 m) Maximum Raking Wheel Hubs: Ball Bearing Number of Transport Wheels: 2

Number of Raking Wheels: 8 Transport Wheels: 205/75-15 Hitch Jack: Standard Center Kicker Wheel: Optional

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0360XF | | WR3108 High Capacity Carted Wheel Rake | 9,645.00 |
| | | CENTER KICKER WHEEL OPTION | |
| 3100 | | Center Kicker Wheel | 772.00 |
| 3110 | | No Center Kicker Wheel WR31 Series Wheel Rake. | In Base Price |
| | | WIND PANEL OPTION | |
| 9101 | | Wind Panel Kit for 60 Inch Wheel (WR31 Series) Includes hardware and qty of 8 wind panels. | 265.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5HPAROCKWS | Miscellaneous Center Kicker Wheel (WR31 Series) | 889.91 |
| | 5HPBFOWP60 | Wind Panel (WR31 Series) Includes mounting hardware and one wind panel only. | 51.57 |

Hay & Forage

| WR3108 High Ca | apacity Carted Wheel Rake Continued |
|----------------|-------------------------------------|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| THIS PAGE INTE | ENTIONALLY LEFT BLANK |

Hay & Forage

WR3110 High Capacity Carted Wheel Rake

Equipment for Base Machine

Rake Wheel Diameter: 60 In. (1524 mm)
Teeth Per Wheel: 40
Tooth Diameter: 0.28 In. (7 mm)
Transport Width: 10.3 Ft. (3.2 m)
Transport Length: 23.3 Ft. (7.1 m)
Windrow Width Adjustment: 16 to 90 In. (406 to 2286

Number of Raking Wheels: 10 Transport Wheels: 205/75-15 Hitch Jack: Standard Center Kicker Wheel: Optional

5HPBFOWP60 Wind Panel (WR31 Series)


Includes mounting hardware and one wind panel only.

Working Width: 20 Ft. (6.1 m) Maximum Raking Wheel Hubs: Ball Bearing Number of Transport Wheels: 2

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0361XF | | WR3110 High Capacity Carted Wheel Rake | 10,303.00 |
| | | CENTER KICKER WHEEL OPTION | |
| 3100 | | Center Kicker Wheel | 772.00 |
| 3110 | | No Center Kicker Wheel WR31 Series Wheel Rake. | In Base Price |
| | | WIND PANEL OPTION | |
| 9101 | | Wind Panel Kit for 60 Inch Wheel (WR31 Series) Includes hardware and qty of 10 wind panels. | 333.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5HPAROCKWS | Miscellaneous Center Kicker Wheel (WR31 Series) | 889.91 |

51.57

Hay & Forage

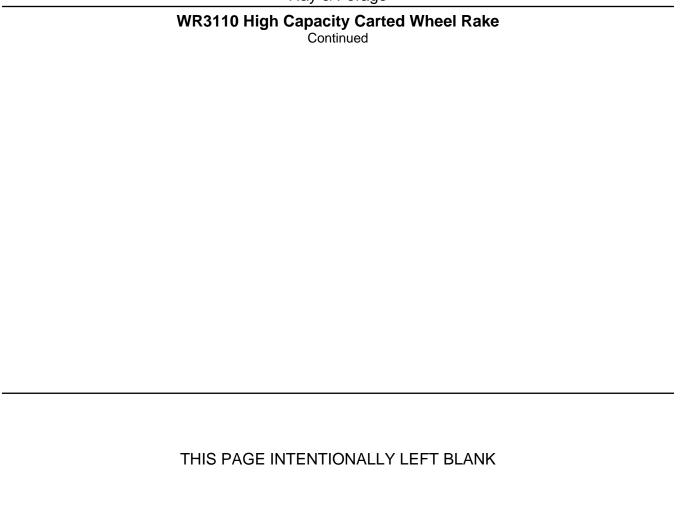

Hay & Forage

WR3112 High Capacity Carted Wheel Rake

Equipment for Base Machine

Rake Wheel Diameter: 60 In. (1524 mm)
Teeth Per Wheel: 40
Tooth Diameter: 0.28 In. (7 mm)
Transport Width: 11 Ft. (3.4 m)
Transport Length: 25.75 Ft. (7.6 m)
Windrow Width Adjustment: 16 to 90 In. (406 to 2286 mm)
Working Width: 24 Ft. (7.3 m) Maximum
Raking Wheel Hubs: Ball Bearing
Number of Transport Wheels: 2

Number of Raking Wheels: 12 Transport Wheels: 205/75-15 Hitch Jack: Standard Center Kicker Wheel: Optional

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0362XF | | WR3112 High Capacity Carted Wheel Rake | 11,275.00 |
| | | CENTER KICKER WHEEL OPTION | |
| 3100 | | Center Kicker Wheel | 772.00 |
| 3110 | | No Center Kicker Wheel WR31 Series Wheel Rake. | In Base Price |
| | | WIND PANEL OPTION | |
| 9101 | | Wind Panel Kit for 60 Inch Wheel (WR31 Series) Includes hardware and qty of 12 wind panels. | 399.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5HPAROCKWS | Miscellaneous Center Kicker Wheel (WR31 Series) | 889.91 |
| | 5HPBFOWP60 | Wind Panel (WR31 Series) Includes mounting hardware and one wind panel only. | 51.57 |

Hay & Forage

| WR3112 High Capacity Carted Wheel Rake Continued |
|--|
| |
| |
| |
| |
| |
| |
| |
| |
| THIS PAGE INTENTIONALLY LEFT BLANK |
| |

Hay & Forage

WR5417 High Capacity Wheel Rake

Equipment for Base Machine

Number of Wheels: 17
Teeth per Wheel: 36
Tooth Diameter: 7 mm
Wheel Diameter: 60 in.
Transport Width: 12 ft. 4 in.
Transport Length: 28 ft. 4 in.
Raking Width: 29 ft.
Windrow Width Adjustment:
Maximum Finished Windrow Width 72.3 in.
Raking Wheel Hubs: Tapered Bearings
Wing Flex: None
Number of Transport Wheels: 4
Hitch Jack: Standard

Tandem Rear Wheels: Standard Transport Wheels: 9.5L x 15 Gauge Wheels: None Assembly/Set-Up Time: 6 Hours (2 Personnel) Weight: 5900 lbs.

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0311XF | | WR5417 High Capacity Wheel Rake Includes Transport Lights. Raking widths up to 29 Ft. | 41,634.00 |
| | | HITCHES | |
| 2160 | | Clevis Hitch | In Base Price |
| 2110 | | Ball Hitch (2 5/16 in) cast coupler in lieu of Clevis Hitch | 111.00 |
| 8010 | | SPRINGS WR5417 Bi-Directional Springs | 3,073.00 |
| 9200 | | OPERATOR'S MANUAL AND DECAL KIT French Operators Manual and Decal Kit (WR5417) | No Added Cost |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5PQ102007 | Miscellaneous Ball Hitch, Field Conversion | 171.60 |
| | 5PQ903186 | Operator's Manual And Decal Kit French Operators Manual and Decal Kit (WR5417) | 135.31 |
| | 5PQ507342 | Springs WR5417 Bi-Directional Springs | 3,188.91 |

Hay & Forage

WR5417 High Capacity Wheel Rake Continued

| THIS | SPA | GF II | NTFN | ITIONAL | IYIFF | T BLANK |
|------|----------|---------|------------------|-----------------|-------|---------|
| | <i>-</i> | \circ | 1 L 1 | 4 I I O I 4/ \L | | |

Hay & Forage

RR2109 - 9 Ft. Raking Width Rotary Rake

Equipment for Base Machine

Tandem Axles With Four Bolt Wheels Exclusive Level-Lift Hydraulics Totally Enclosed Oil Bath Gearbox Heat Treated, Double-Tooth
Spring Steel Tines
Safety Tow Chain is Standard Equipment
1 Year Parts and Labor Warranty

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0131XF | | RR2109 - 9 Ft. Raking Width Rotary Rake | 10,354.00 |
| | | OPERATOR'S MANUAL AND DECAL KIT | |
| 9200 | | French Operators Manual and Decal Kit RR2109 Rotary Rake | No Added Cost |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5PQ903180 | Miscellaneous French Operators Manual & Decal Kit (RR2109) Rotary Rake | 113.31 |

Destination of Quebec only. Includes French safety decals and manual.

Hay & Forage



THIS PAGE INTENTIONALLY LEFT BLANK

Hay & Forage

RR2211 - 11 Ft. Raking Width Rotary Rake

Equipment for Base Machine

Tandem Axles With Four Bolt Wheels Exclusive Level-Lift Hydraulics Totally Enclosed Oil Bath Gearbox Heat Treated, Double-Tooth Spring Steel Tines Safety Tow Chain is Standard Equipment 1 Year Parts and Labor Warranty

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0141XF | | RR2211 - 11 Ft. Raking Width Rotary Rake | 13,865.00 |
| | | OPERATOR'S MANUAL AND DECAL KIT | |
| 9200 | | French Operators Manual and Decal Kit RR2211 Rotary Rake | No Added Cost |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5PQ903181 | Miscellaneous French Operators Manual & Decal Kit (RR2211) Rotary Rake | 100.11 |

Destination of Quebec only. Includes French safety decals and manual.

Hay & Forage

RR2211 - 11 Ft. Raking Width Rotary Rake Continued

Hay & Forage

RR2313 - 13 Ft. Raking Width Rotary Rake

Equipment for Base Machine

13 ft. Clean sweep raking width
15 ft. Working width
8 ft. 2 in. Transport width
6 ft. 6 in. Transport height
Tandem walking beam axles with 18.5 in. wheels
Removable rotor arms for easy storage and narrow
transport
Stub shafts removable w/o disassembling gearbox
Oversized swivel gearbox
Standard hydraulic rear curtain

4 Heat treated, double-tooth spring steel times per arm
13 Time arms per rotor
Safety tow chain standard

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0301XF | | RR2313 - 13 Ft. Raking Width Rotary Rake | 22,711.00 |
| | | FLOTATION TIRES | |
| 1095 | | No Extra Tires | In Base Price |
| 1010 | | Extra Tires Includes 2 additional flotation tires and 2 spindles for mounting to front of each walking beam (RR2313). | 428.00 |
| | | OPERATOR'S MANUAL AND DECAL KIT | |
| 9200 | | French Operators Manual and Decal Kit RR2313 Rotary Rake | No Added Cost |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5PQ580035 | Miscellaneous Extra Flotation Tires (RR2313) Note: Includes 2 additional flotation tires and 2 spindles for mounting to front of each walking beam. | 444.40 |
| | 5PQ903187 | French Operators Manual & Decal Kit (RR2313) Rotary Rake Destination of Quebec only. Includes French safety decals and manual. | 110.00 |

Hay & Forage



transport

Lint Dains

FRONTIER PRODUCTS

Hay & Forage

RR2324 - 24 Ft. Raking Width Tandem Rotary Rake

Equipment for Base Machine


Trailed Style with Heavy Duty Frame
Capable of raking two individual windrows or one
combined windrow
24 ft. Clean sweep raking width
27 ft. Working width
8 ft. 2 in. Transport width
6 ft. 6 in. Transport height
Tandem walking beam axles with 18.5 in. wheels
Front pitch gauge wheels on rear rotor with 18.5
in. wheels
Manifold eliminates 60% of hydraulic connections

Removable rotor arms for easy storage and narrow

Stub shafts removable w/o disassembling gearbox Oversized swivel gearbox Standard hydraulic rear curtain 4 Heat treated, double-tooth spring steel tines per arm 13 Tine arms per rotor Lights & safety tow chain standard

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0302XF | | RR2324 - 24 Ft. Raking Width Tandem Rotary Rake Includes Transport Lights. | 46,200.00 |
| | | FLOTATION TIRES | |
| 1095 | | No Extra Tires | In Base Price |
| 1010 | | Extra Tires Includes 4 additional flotation tires (2 per rotor) and 4 spindles for mounting to front of each walking beam (RR2324). | 854.00 |
| | | OPERATOR'S MANUAL AND DECAL KIT | |
| 9200 | | French Operators Manual and Decal Kit RR2324 Rotary Rake | No Added Cost |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5PQ580030 | Miscellaneous Extra Flotation Tires (RR2324) Note: Includes 4 additional flotation tires (2 per rotor) and 4 spindles for mounting to front of each walking beam. | 886.60 |
| | 5PQ903188 | French Operators Manual & Decal Kit RR2324 Rotary Rake Destination of Quebec only. Includes French safety decals and manual. | 124.31 |

Hay & Forage

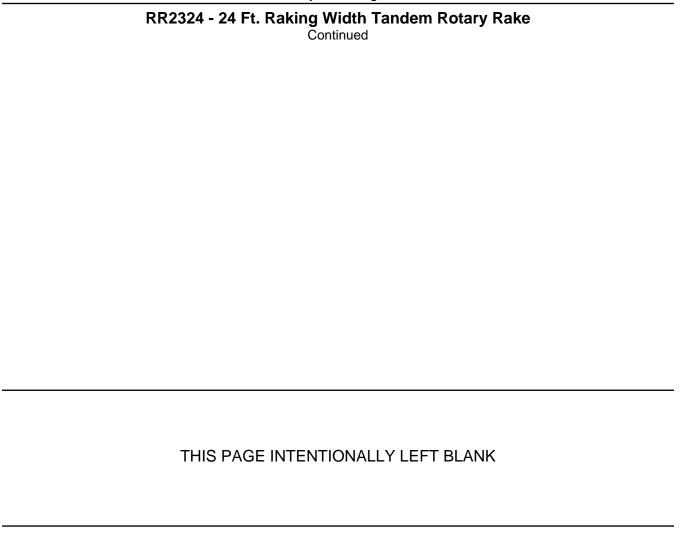

Hay & Forage

BU1060 Bale Unroller

Equipment for Base Machine

3-Point Hitch Compatibility:
Category I and II (iMatch and
Quick Coupler - II and IIIN)
Framing: Tubular
Optional Hydraulics:
2 In. x 8 In. Hydraulic Cylinder
Dimensions:
24 In. H x 50 In. W x 53 In. L
Equipment Weight: 310 lb.

5WS832135

Bale Handling Capacity: One Large Round Bale (2000 lb. limit)

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0011XF | | BU1060 Bale Unroller | 1,197.00 |
| | | HYDRAULIC ACTUATION | |
| 1010 | | Hydraulic Kit to Actuate BU1060 Bale Unroller Includes cylinder, hoses, and tips. | 382.00 |
| 1095 | | Less Hydraulic Actuation 2 In. x 8 In. hydraulic cylinder required with approximately 60 In. of 1/4 In. hose recommended. | In Base Price |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | | Miscellaneous | |

Hydraulic Kit to Actuate Bale Unroller - Includes Cylinder, Hoses, and Tips (BU1060)

396.00

Hay & Forage

BU1060 Bale Unroller Continued

Hay & Forage

BC1108 Bale Carrier - U.S.

Equipment for Base Machine

Handles bale sizes from 4' x 4' to 5' x 5' (diameter x width)
4' bale width - 8 bale capacity
5' bale width - 6 bale capacity
Complete self-loading and unloading operation
2 remote outlets required to operate
Comes complete with electric diverter valve for third function to operate unloading tilt cylinder All wiring and hose couplers included
Heavy duty loading arm
Transport safety lights, SMV, reflectors

Double cylinders on tilt bed (4) 12.5 x 15 12 ply tires 10' 5" wide 20' long plus extensions for end bale

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| 0252XF | | BASE MACHINE BC1108 Bale Carrier - U.S. Includes rear extensions. | 31,443.00 |

ATTACHMENTS FOR FIELD CONVERSION

Operator's Manual and Decals
5TBBC118FROM French Operators Manual & Decals BC1108 Bale Carrier

50.60

Hay & Forage

BC1108 Bale Carrier - U.S. Continued

Hay & Forage

BC1110 Bale Carrier - U.S.

Equipment for Base Machine

Handles bale sizes up to 6' x 6' (diameter x width) 6' bale width - 10 bale capacity
Complete self-loading and unloading operation
2 remote outlets required to operate
Comes complete with electric diverter valve for
third function to operate unloading tilt cylinder
All wiring and hose couplers included
Heavy duty loading arm
Transport safety lights, SMV, reflectors
Double cylinders on tilt bed

(4) 32/15.5x16.5 14ply Galaxy Tires 11' 11" wide 28' long plus extensions for end bale

| 0253XF | | BC1110 Bale Carrier - U.S. Includes rear extensions. | 38,090.00 |
|--------|------------|--|-------------------------|
| | | BASE MACHINE | |
| | | Select One Code From Each Required Category | |
| Code | Identifier | Description | USD (\$) |
| | Attachment | | List Price Suggested |

ATTACHMENTS FOR FIELD CONVERSION

Operator's Manual and Decals
5TBBC110FROM French Operators Manual & Decals BC1110 Bale Carrier

50.60

Lint Dains

Hay & Forage

BC1110 Bale Carrier - U.S. Continued

Hay & Forage

LW1166 Inline Bale Wrapper - U.S.

Equipment for Base Machine

Fully automatic cycling
Electric start 13 HP Honda gas engine (18 amp charging system)
Spark arrester on engine
Low oil alert on engine
Transport safety lights, SMV, reflectors
Temperature gauge on hydraulic tank
Lock pin on hoop to reload plastic
Hydraulic steering
Electric hydraulic switch in control panel
Main control panel wired for field installed options
Hydraulic over center cam axle to pack bales tightly

Adjustable stroke length on charge table 2 - 30" pretensioners
Cross tube unloading (to push off last bale)
Adjustable length tongue
Automatically idles down when cycle completed
Safety shut off switch on guards
Guide rollers for side hill operation
Lug tires on rear axle

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0261XF | | LW1166 Inline Bale Wrapper - U.S. Includes plastic sensor shutdown and guide rollers. | 44,460.00 |
| | | HYDRAULIC POWER DRIVE | |
| 1010 | | Single Wheel Hydraulic Power Drive LW1166 | 984.00 |
| 1020 | | Dual Wheel Hydraulic Power Drive LW1166 | 1,972.00 |
| 1095 | | No Hydraulic Power Drive | In Base Price |
| | | ENGINE | |
| 2000 | | 13 HP Honda Engine | In Base Price |
| 2010 | | 20 HP Honda Engine Includes High Flow Pump for faster cycle times. | 3,620.00 |
| | | REMOTE CONTROL | |
| 3010 | | Remote Steering and Shutdown | 1,448.00 |
| 3095 | | No Remote Steering and Shutdown | In Base Price |
| | | BALE PUSH OFF ARM | |
| 5020 | | No Bale Push Off Arm | In Base Price |
| 5021 | | Bale Push Off Arm | 1,070.00 |
| | | BALE FOLLOWER | |
| 1810 | | No Bale Follower | In Base Price |

Hay & Forage

LW1166 Inline Bale Wrapper - U.S.

Continued

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|------|-----------------------|---|-------------------------------------|
| 1811 | | BALE FOLLOWERContinued Bale Follower | 1,892.00 |
| 8010 | | WORK LIGHTS Halogen Night Working Lights Includes three lights. | 285.00 |
| 8041 | | LED Night Working Lights Includes three lights. | 536.00 |
| 8030 | | TWIN WRAP KIT Twin Wrap Kit For double plastic. | 699.00 |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | 5TBMPO5000F | Miscellaneous Bale Push Off Arm | 1,109.91 |
| | 5TBNWLKLEDF | LED Night Working Lights | 556.60 |
| | 5TBHPDD5000F | LW11 Dual Wheel Hydraulic Power Drive | 2,172.51 |
| | 5TBHPD5000F | LW11 Single Wheel Hydraulic Power Drive | 1,081.31 |
| | 5TBNWLKF | LW11/LW12 Halogen Night Working Lights | 313.51 |
| | 5TBRSSKX2HDF | LW11/LW12 Remote Steering and Shutdown | 1,591.71 |
| | 5TBTWKF | LW11/LW12 Twin Wrap Kit | 767.80 |
| | 5TBSSKF | Shielding (Order only for machines sold into Quebec.) | 0.00 |

I NONTIEN I NODOC

Hay & Forage

SB3106 - 5 ft. 9 In Sickle Bar Mower

Equipment for Base Machine

Working Width:
5 ft. 9 in. (1.75 m)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum): 25 HP
Tractor PTO HP (Maximum): 50 HP
Hitch:
Category I, Category II,
and iMatch Compatible
Parking Stand Included
Height Adjustment: Skid Shoes
Drive:
Belt with Manual Adjustment

5GH89900522

for Belt Tension Driveline Protection: Slip Clutch Safety Trip Linkage Hydraulic Lifting Cylinder for Cutting Bar Double Action Cutting Bar

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |
| 0281XF | | SB3106 - 5 ft. 9 In Sickle Bar Mower Order in multiples of two. | 5,512.00 |
| | | OPERATOR'S MANUAL AND PARTS CATALOG | |
| 9200 | | French Operators Manual and Parts Catalog (SB31 Series Sickle Bar Mower) | No Added Cost |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | | Miscellaneous | |

French Operators Manual and Parts Catalog (SB31 Series Sickle Bar Mower)

20.91

Hay & Forage

SB3106 - 5 ft. 9 In Sickle Bar Mower Continued

Hay & Forage

SB3107 - 6 Ft. 9 In. Sickle Bar Mower

Equipment for Base Machine

Working Width:
6 ft. 9 in. (2.05 m)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum): 25 HP
Tractor PTO HP (Maximum): 50 HP
Hitch:
Category I, Category II,
and iMatch Compatible
Parking Stand Included
Height Adjustment: Skid Shoes
Drive:
Belt with Manual Adjustment

5GH89900522

for Belt Tension Driveline Protection: Slip Clutch Safety Trip Linkage Hydraulic Lifting Cylinder for Cutting Bar Double Action Cutting Bar

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|---------|--------------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category | |
| 2000//5 | | BASE MACHINE | F 755 00 |
| 0282XF | | SB3107 - 6 Ft. 9 In. Sickle Bar Mower Order in multiples of two. | 5,755.00 |
| | | OPERATOR'S MANUAL AND PARTS CATALOG | |
| 9200 | | French Operators Manual and Parts Catalog (SB31 Series Sickle Bar Mower) | No Added Cost |
| | | ATTACHMENTS FOR FIELD CONVERSION | |
| | | Miscellaneous | |

French Operators Manual and Parts Catalog (SB31 Series Sickle Bar Mower)

20.91

Hay & Forage

| SB3107 - 6 Ft. 9 In. Sickle Bar Mower |
|---------------------------------------|
| Continued |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| THIS PAGE INTENTIONALLY LEFT BLANK |
| THIS FAGE INTENTIONALLT LEFT BLAIN |
| |
| |

Hay & Forage

SB3108 - 7 Ft. 8 In. Sickle Bar Mower

Equipment for Base Machine

Working Width: 7 Ft. 8 In. (2.35 m) Tractor PTO Speed: 540 RPM Tractor PTO HP (Minimum): 25 HP Tractor PTO HP (Maximum): 50 HP Hitch: Category I, Category II, and iMatch Compatible Parking Stand Included Height Adjustment: Skid Shoes Drive: Belt with Manual Adjustment

5GH89900522


for Belt Tension Driveline Protection: Slip Clutch Safety Trip Linkage Hydraulic Lifting Cylinder for Cutting Bar Double Action Cutting Bar

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|--------------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category |] |
| 0283XF | | BASE MACHINE SB3108 - 7 Ft. 8 In. Sickle Bar Mower Order in multiples of two. | 5,978.00 |
| | | OPERATOR'S MANUAL AND PARTS CATALOG | |
| 9200 | | French Operators Manual and Parts Catalog (SB31 Series Sickle Bar Mower) ATTACHMENTS FOR FIELD CONVERSION | No Added Cost |
| | | Miscellaneous | |

French Operators Manual and Parts Catalog (SB31 Series Sickle Bar Mower)

20.91

Hay & Forage

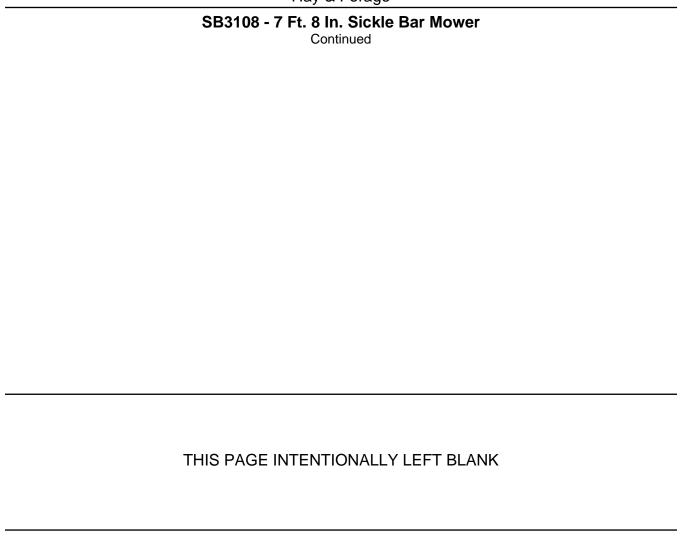

Hay & Forage

HS2001 - 3-Point Single Tine Hay Spear

Equipment for Base Machine


Primary Spears:
One - 47 in. x 1.65 in. (119.4 cm. x 4.2 cm)
(Approximate 41 in. (104.1 cm. Usable Length)
Primary Spear Location: Top
Stabilizing Spears:
Two - 10 in. x 1.25 in. (25.4 cm. x 3.2 cm.)
Stabilizing Spear Location: Bottom
Replaceable Spears: Yes, Bolt-In Tine
Framing: Tubular
Bale Handling Capacity:
One Large Round Bale
Implement Capacity:
2200 lbs. at 24 in. (997.9 kg. at 61 cm.)
Hitch:

Category I and II (iMatch and Quick Coupler)
Dimensions:
24.75 in. (H) x 37.5 in. (W) x 49.5 in. (L) (62.9 cm. x 95.3 cm. x 125.7 cm.)
Assembly: 15 Minutes
Operational Weight: 72 lbs. (32.7 kg.)
Warranty: 1 Year

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|--------|-----------------------|--|-------------------------------------|
| | | Select One Code From Each Required Category | |
| 2280XF | | BASE MACHINE HS2001 - 3-Point Single Tine Hay Spear | 439.00 |

Attachment Information is not available in MOCI for the base code 2280XF

Hay & Forage

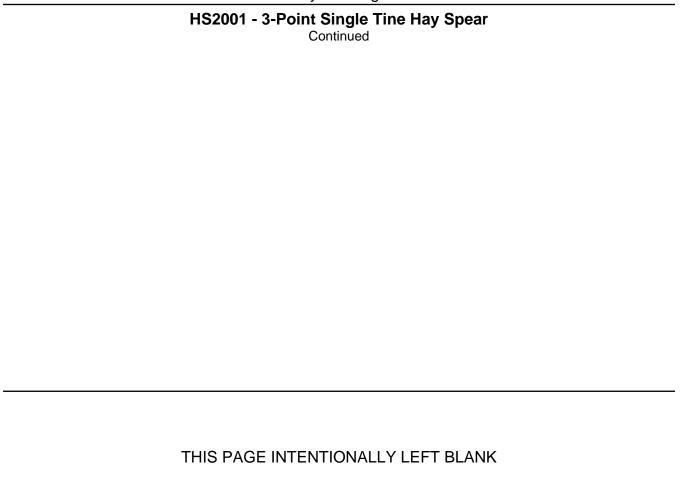

2281XF

List Price

614.00

FRONTIER PRODUCTS

Hay & Forage

HS2002 - 3-Point Dual Tine Hay Spear

Equipment for Base Machine

Primary Spears:
Two - 47 in. x 1.65 in. (119.4 cm. x 4.2 cm)
(Approximate 42.5 in. (108 cm. Usable Length)
Primary Spear Location: Bottom Replaceable Spears: Yes, Bolt-In Tine Framing: Tubular Bale Handling Capacity: One Large Round Bale Implement Capacity: 3000 lbs. at 24 in. (1,360.8 kg. at 61 cm.) Hitch: Category II and III (Quick Coupler - II, III, and 3N)

26.5 in. (H) x 47.5 in. (W) x 51.5 in. (L) (67.3 cm. x 120.7 cm. x 130.8 cm.)
Assembly: 15 Minutes
Operational Weight: 138 lbs. (62.6 kg.)
Warranty: 1 Year Dimensions:

| Code | Attachment Identifier | Description | Suggested USD (\$) |
|------|--------------------------|---|-----------------------|
| | | Select One Code From Each Required Category | 7 |
| | | Select One Code From Each Required Category | _ |
| | | BASE MACHINE | |

HS2002 - 3-Point Dual Tine Hay Spear

Attachment Information is not available in MOCI for the base code 2281XF

SCCPS Grounds Equipment - Bid #ESCNJ 18/19-25

Hay & Forage

HS2002 - 3-Point Dual Tine Hay Spear Continued

| THIS PAGE INTENTIONALLY LEFT BLANI | TΗ | IS | PAGE | INTE | NOITN | IALLY | LEFT | BLAN | K |
|------------------------------------|----|----|------|------|-------|-------|------|------|---|
|------------------------------------|----|----|------|------|-------|-------|------|------|---|

2282XF

900.00

FRONTIER PRODUCTS

Hay & Forage

HS2003 - 3-Point Triple Tine Hay Spear

Equipment for Base Machine

Primary Spears:
Three - 47 in. x 1.65 in. (119.4 cm. x 4.2 cm)
(Approximate 42.5 in. (108 cm. Usable Length)
Primary Spear Location: Bottom
Replaceable Spears: Yes, Bolt-In Tine
Framing: Tubular
Bale Handling Capacity:
One Large Square Bale
Implement Capacity:
3000 lbs. at 24 in. (1,360.8 kg. at 61 cm.)
Hitch:
Category II and III
(Quick Coupler - II, III, and 3N)

Dimensions: 26.5 in. (H) x 60 in. (W) x 51.5 in. (L) (67.3 cm. x 152.4 cm. x 130.8 cm.) Assembly: 30 Minutes Operational Weight: 178 lbs. (80.7 kg.) Warranty: 1 Year

| Code | Attachment Identifier | Description | List Price Suggested USD (\$) |
|------|--------------------------|---|-------------------------------------|
| | | Select One Code From Each Required Category | |
| | | BASE MACHINE | |

Attachment Information is not available in MOCI for the base code 2282XF

HS2003 - 3-Point Triple Tine Hay Spear

Hay & Forage

HS2003 - 3-Point Triple Tine Hay Spear Continued

| THIS PAGE INTENTIONALLY LEFT BLAN | ΤН | IS P | AGE | INTEN | NTIONALLY | / LEFT | BLAN |
|-----------------------------------|----|------|-----|-------|-----------|--------|------|
|-----------------------------------|----|------|-----|-------|-----------|--------|------|

2283XF

List Price

1,223.00

FRONTIER PRODUCTS

Hay & Forage

HS2004 - 3-Point Quadruple Tine Hay Spear

Equipment for Base Machine

```
Primary Spears:
Four - 47 in. x 1.65 in. (119.4 cm. x 4.2 cm)
(Approximate 42.5 in. (108 cm. Usable Length)
Primary Spear Location: Bottom
Replaceable Spears: Yes, Bolt-In Tine
Framing: Tubular
Bale Handling Capacity:
Two Large Round Bales (up to 5 ft. x 6 ft.(1.5 m x 1.8 m)
Implement Capacity:
4000 lbs. at 24 in. (1,814.4 kg. at 61 cm.)
Hitch:
Category II and III
```

```
(Quick Coupler - II, III, and 3N)
Dimensions:
26.5 in. (H) x 96 in. (W) x 51.5 in. (L) (67.3 cm. x 243.8 cm. x 130.8 cm.)
Assembly: 30 Minutes
Operational Weight: 255 lbs. (115.7 kg.)
Warranty: 1 Year
```

| Code | Attachment Identifier | Description | Suggested USD (\$) |
|------|-----------------------|---|-----------------------|
| | | Select One Code From Each Required Category | 1 |
| | | | 1 |
| | | BASE MACHINE | |

Attachment Information is not available in MOCI for the base code 2283XF

HS2004 - 3-Point Quadruple Tine Hay Spear

Hay & Forage

| н | S2004 - 3-Point Quadruple Tine Hay Spear Continued | |
|---|--|--|
| | Continued | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| Т | THIS PAGE INTENTIONALLY LEFT BLANK | |